

Atmospheric Haze Protocol

Draft 8/31/00

Atmospheric Haze Protocol



Purpose

To measure the aerosol optical thickness of the atmosphere (to measure how much of the sun's light is scattered or absorbed by particles suspended in the air)

Educational Outcomes

Students learn what causes hazy skies and the concept that only some of the sun's light reaches them.

Overview

Students point a GLOBE sun photometer at the sun and record the largest voltage reading they obtain on a digital voltmeter connected to the photometer. Students observe sky conditions near the sun and perform the *Cloud Cover*, *Cloud Type*, and *Barometric Pressure Protocols*.

Time

20 minutes

Level

Middle and Secondary

Frequency

Every day, weather permitting
Mid-morning is preferred.

Key Concepts

Atmospheric composition
Haze and air pollution
Variation in solar position

Skills

Using a digital voltmeter
Recording data
Coordinating data from several sources

Materials and Tools

Calibrated and aligned GLOBE sun photometer
Digital voltmeter
Watch, preferably digital
Atmospheric Haze/Aerosols Data Work Sheet
Pencil or pen

Preparation

Carry out *Sun Photometer Alignment Activity* (one time only).

Practice using a digital voltmeter.

Mount and calibrate the barometer for the *Barometric Pressure Protocol*.

Prerequisites

Cloud Cover and *Cloud Type Protocols*
Barometric Pressure Protocol

Teacher Support

Background

The atmosphere contains more than just molecules of gas (e.g., nitrogen, oxygen, etc.). There are also small solid or liquid particles, called aerosols, suspended in the air. They come from natural sources such as condensation and freezing of water vapor, volcanoes, dust storms, and the evaporation of sea spray. They also come from human activities such as burning fossil fuels and biomass (e.g., wood, dung, dried leaves) and plowing or digging up soil. Individual aerosols are too small to be visible, but their presence often can be inferred from air that looks dirty or hazy. Most aerosols are in the troposphere, but large volcanic eruptions can inject aerosols and gases which form aerosols into the stratosphere.

Measurement of aerosol optical thickness can provide important information about the concentration, size distribution, and variability of aerosols in the atmosphere. This information is needed for climate studies, for validation of satellite data and to understand the health effects of aerosols.

Aerosol concentrations vary significantly with location and time. There are seasonal variations as well as unpredictable changes due to events such as large dust storms and volcanic eruptions. Volcanic aerosols, in particular, can produce aerosol plumes that circle Earth in detectable concentrations for months. In the stratosphere, volcanic aerosols can persist for years.

Aerosols are highly mobile. They can cross oceans and mountain ranges. Biomass burning causes large local increases in aerosol concentrations that can affect regional weather. Volcanic aerosols first circle the globe and then spread in latitude. They have caused measurable decreases in surface temperature thousands of kilometers from their sources.

Global measurements are needed to monitor the present distribution of aerosols and to track events

that alter aerosol concentrations. Their study can lead to a better understanding of Earth's climate and how it is changing. Aerosols affect the climate by altering the way the atmosphere transmits, reflects, and absorbs sunlight. Some scientists believe that, in some parts of the world, aerosols may offset the warming effects of carbon dioxide and other greenhouse gases, and may even cause lower temperatures. It is generally agreed that skies in many parts of the world are hazier than they were one or two centuries ago, even in rural areas. Hazy skies are often associated with air pollution.

Aerosol optical thickness (AOT, also called aerosol optical depth) is a measure of the extent to which small particles in the atmosphere affect the transmission of sunlight through the atmosphere. The larger the optical thickness at a particular wavelength, the less light of that wavelength reaches Earth's surface. A typical aerosol optical thickness value for visible light in clear air is roughly 0.1. A very clear sky may have an AOT of 0.05 or less. Very hazy skies can have AOTs of 0.3 or greater.

It may be easier to understand the concept of optical thickness when it is expressed in terms of the percentage of light that is transmitted through the atmosphere, according to this formula:

$$\text{percent transmission} = 100 \cdot e^{-a}$$

where a is optical thickness at a particular wavelength. This calculation gives the percentage of light at a particular wavelength that would be transmitted through the atmosphere if the sun were directly overhead. (Note that for latitudes outside the tropics, the sun is never directly overhead.) For an optical thickness of 0.1, the percent transmission is about 90%.

A sun photometer is a device that measures the intensity of sunlight over one or more specific wavelength ranges. Each channel of a sun photometer gives aerosol optical thickness at a particular wavelength of light, but it does not provide information about the size distribution



of aerosols. Combining data from more than one channel provides information on size distribution, and this is important because it provides information about the source of aerosols. The smaller the aerosol particles, the more the aerosol optical thickness depends on the wavelength of the light being detected. Dust aerosols, for example, tend to be bigger than aerosols from smoke and some kinds of air pollution, so a two-channel sun photometer (one that measures light at two different wavelengths) helps distinguish dust from smoke or other sources of aerosols.

In order to provide information about aerosol size distributions, students will use the GLOBE sun photometer that measures light at two wavelengths – green light at just greater than 500 nm and red light at about 625 nm. Green light is near the peak sensitivity of the human eye; hence, a sky with a large aerosol optical thickness at this wavelength will appear hazy. Red light is more sensitive to larger aerosols. From these measurements, scientists can determine the concentration of aerosols present and can also learn something about the size distribution of aerosols.

Measurements taken with the GLOBE sun photometer are in units of volts. These values must be converted to aerosol optical thickness. Since the calculations require mathematics (logarithmic and exponential functions) that are appropriate only for high school students taking a pre-calculus course, the GLOBE Data Server will perform the calculations based on the volt readings submitted by students and return a value of optical thickness for students to use. There is a Learning Activity for advanced students that includes the equation for converting sun photometer measurements into aerosol optical thickness. For students who are not yet comfortable with exponential functions, the following is a table giving percent transmission as a function of optical depth.

Table AT-AH-1

Optical Depth	Percent Transmission
0.10	90.5%
0.20	81.9%
0.30	74.1%
0.40	67.0%
0.50	60.7%
0.60	54.9%
0.75	47.2%
1.00	36.8%
1.25	28.7%
1.50	22.3%
2.00	13.5%
2.50	8.2%
3.00	5.0%
3.50	3.0%
4.00	1.8%
5.00	0.7%

Student Preparation

1. The output from the GLOBE sun photometer is read with a digital voltmeter. Prior to implementing this protocol, it will be helpful to spend a few minutes in your classroom or lab practicing how to use a digital voltmeter. One important fact about a digital voltmeter is that when its leads are connected to a circuit that is not producing a voltage signal, the digital display may indicate the presence of a small voltage (perhaps a few millivolts), which may be negative or positive and may constantly change. This is normal operation, but it may be confusing to students who are expecting to see a voltage of 0.0 V.

2. In order to calculate aerosol optical thickness from your measurements, GLOBE must know the barometric pressure at your site when you took your measurements (the station pressure). You must use a barometer or altimeter to obtain this value. Unless you are at sea level, this is not the barometric pressure reported on broadcast weather or in your local newspaper. Why? Because in such reports, the local barometric pressure has been adjusted to what it would be if you were at sea level. This caution applies also to weather data taken from the Web, which can be assumed to correspond to the weather reporting standard unless specifically stated otherwise. *If your site is within a few tens of meters of sea level, you can use the reported barometric pressure instead of taking the measurement.*

You do not need barometric pressure at the exact time of your measurement because the pressure correction is relatively small and, at least during weather conditions suitable for sun photometer measurements, the pressure does not change significantly over the space of an hour or so. Unlike the sun photometer measurements themselves, for which the time must be reported as accurately as possible, it is sufficient for barometric pressure simply to do the best you can with getting barometric pressure near the time of your sun photometer measurements. For additional information, see the *Barometric Pressure Protocol*.

3. The presence of thin, high clouds may affect the readings if they are in front of the sun. GLOBE requires students to do the *Cloud Protocols* at the same time as the Haze/Aerosol measurements. So, students need to be experienced in cloud observations.

4. As noted below, students may need to complete an alignment procedure before they begin taking measurements with a GLOBE sun photometer. The purpose of asking students to do this activity even with a sun photometer obtained from a commercial source is to familiarize them with the operation of the instrument before they begin collecting reportable data. The alignment procedure needs to be done only once unless the alignment brackets are moved.

5. Sun photometer measurements are easy to take and the quality of the data can be very high if the measurements are done carefully. However, because the GLOBE sun photometer is a relatively inexpensive instrument, it involves some design compromises. As a result, it is especially important to take measurements in the prescribed way and under acceptable sky conditions.

A *Classroom Preparation Guide* is provided to help you prepare. It describes in detail the steps required to take and record a measurement, along with the reasons for each step. It parallels the *Student Field Guide* that simply lists the steps in order with a minimum of explanation. As part of their preparation for this protocol, students should study the *Classroom Preparation Guide* to make sure they understand the critical parts of each step.

Understanding Measurements of Atmospheric Haze

Aerosol measurements are best understood in the context of the other GLOBE atmospheric measurements. There may be observable relationships between aerosols and temperature, cloud cover, relative humidity, and precipitation. There is certainly a seasonal component to aerosols. Thus, it is helpful to approach this topic as part of a big picture of the atmosphere and its properties.



An introduction to the concepts of solar elevation angle and relative air mass is essential to understanding these measurements as opposed to simply collecting data. The *Solar Gnomon Learning Activity* includes measurements of these values. Advanced-level students with appropriate mathematics backgrounds can use this Learning Activity to calculate their own value for aerosol optical thickness, which they can compare to the value calculated by the GLOBE Data Server.

Where and When to Take Sun Photometer Measurements

The logical place to take sun photometer measurements is the same place where you do the *Cloud Protocols*. If you take measurements at some other place, you need to define it as an additional Atmosphere Study Site.

Ideally, aerosol measurements should be made in the morning at a relative air mass between about 1.5 and 2.0 corresponding to solar elevation angles between 42 and 30 degrees. This is because generally, the air in the morning is less turbulent than air near noon when the sun is high in the sky, or in the afternoon, especially in the heat of summer. The less turbulent the air, the easier it is to obtain reliable measurements. At some latitudes and seasons, measurements taken at the same time you record maximum and minimum temperature (near solar noon) will be at air masses of 1.5 to 2.0. At high latitudes in winter, the air mass through which the sun is seen is greater than 2.0 at local solar noon. So, varying the time of observation during the year is desirable.



Student Support

Scientific Justification

This GLOBE activity uses an instrument called a sun photometer to monitor the concentration of small liquid or solid particles in the atmosphere (aerosols). Aerosols come from volcanoes, sea spray, dust, smoke, wind erosion of surface soil, and air pollution. They also come from water vapor freezing or condensing. Aerosols are too small to see individually, but you can often see their effect when the sky is hazy or looks dirty. Brilliant orange skies at sunrise and sunset are also good indicators of aerosols.

Aerosols influence our weather and climate because they affect the amount of sunlight reaching Earth's surface. Taken together with other atmospheric measurements, aerosol measurements help scientists to better understand and predict climate.

Scientists have many questions regarding aerosols. How do aerosol concentrations change with the seasons? How are aerosol concentrations related to the weather? How does smoke from large forest fires affect sunlight reaching Earth's surface? How long do volcanic emissions stay in the atmosphere and where do they go? How is air pollution related to aerosols? How do large industrial facilities and agricultural activities affect aerosols? How do aerosols affect a satellite's view of Earth's surface?

There are not nearly enough sun photometers in use around the world to allow scientists to answer these and other questions. Satellite measurements can help fill in the large gaps in global data coverage, but monitoring from the ground is still required to enable accurate interpretation of satellite observations. Scientists employ sun photometers that can cost many thousands of US dollars and require extensive maintenance. Your GLOBE sun photometer is relatively inexpensive, but it will still provide accurate measurements of aerosol optical thickness that are useful to scientists if you follow the protocols carefully.

Your GLOBE sun photometer measures the intensity of light at two wavelengths. One channel

measures green light, at a wavelength of about 500 nanometers (nm), and the other measures red light at about 625 nm. When you report your measurements to GLOBE, the voltage readings from each channel of your sun photometer are converted to aerosol optical thickness (AOT), an indication of how aerosols affect the transmission of sunlight through the atmosphere.

By reporting measurements regularly, you can provide scientists with the data they need and you can start to answer some questions about aerosols for your own data collection site. By building a data record that extends across several seasons and includes data from many locations, GLOBE can help scientists learn more about the global distribution of aerosols.

Synthesis Questions

To what extent is AOT related to other atmospheric variables — temperature, cloud type and cover, precipitation, relative humidity, barometric pressure, and ozone concentration?

How does AOT relate to the appearance of a distant landmark or to the color of the sky?

Does AOT vary seasonally? If so, how?

Does AOT vary with elevation? If so, how?

Preliminary Activity: Aligning Your GLOBE Sun Photometer

If you have purchased your GLOBE sun photometer from an instrument supplier, it has already been aligned and calibrated and you do not need to do this activity. However, if you have made your own sun photometer, if you have dropped your GLOBE sun photometer, or if you have any other reason to think that the alignment has changed, please do this activity. In any case, students can do this activity to check the alignment of their sun photometer. When they have completed this task, they should have a better understanding of how to use a sun photometer, and the measurements they report to GLOBE should be more reliable.

This activity requires two people working as a team. Pick a day when the sun casts a readily discernible shadow. Choose a location where you have an unrestricted view of the sun, such as the site where you observe clouds. The alignment procedure involves finding the pointing position for each channel of your sun photometer that gives the maximum voltage. This position will be easier to determine if the sky is clear near the sun. The sun may cast an obvious shadow even when it is partially obscured by thin clouds, but the voltage output from the photometer may vary considerably from moment to moment. This will make the position of the maximum voltage more difficult to locate.

After students have used the sun photometer several times, they will have a better sense of whether the alignment dot or cross is in the right place. If it appears that the alignment of a GLOBE sun photometer obtained from an instrument supplier is not in the right place, you should notify the supplier. For an instrument you have built yourself, it is important to align the instrument properly. You can repeat this activity and move the alignment dot or cross for both channels as often as required. Once you are comfortable that the dots are in the proper place, use a dark pen or fine-tipped permanent marker to make a cross that is centered on each dot. If, following more use of the photometer, you believe a cross is not in the right place, it is OK to move it. Just peel off the paper label, replace it with a new one, and repeat this activity.

Note: The position of the alignment dots or crosses on the alignment bracket will always be used only as an approximate guide for pointing the photometer. Students should always vary the pointing about this dot to find the maximum voltage and record only this maximum voltage. If the maximum voltage is found consistently at a position away from the alignment mark, you should repeat the alignment activity.

Sun Photometer Alignment

Student Field Guide

Task


Mark the rear alignment bracket on a new GLOBE sun photometer and practice taking measurements.

What You Need

- GLOBE sun photometer
- Pencils (one red and one green, if possible)
- Digital voltmeter

In the Field

1. Connect a digital voltmeter to the output jacks of the sun photometer and turn the voltmeter on. Select a DC volts setting for the voltmeter. If your voltmeter does not have auto-ranging capability, use a 20 V setting.
2. Turn on your sun photometer and select either the red or green channel.

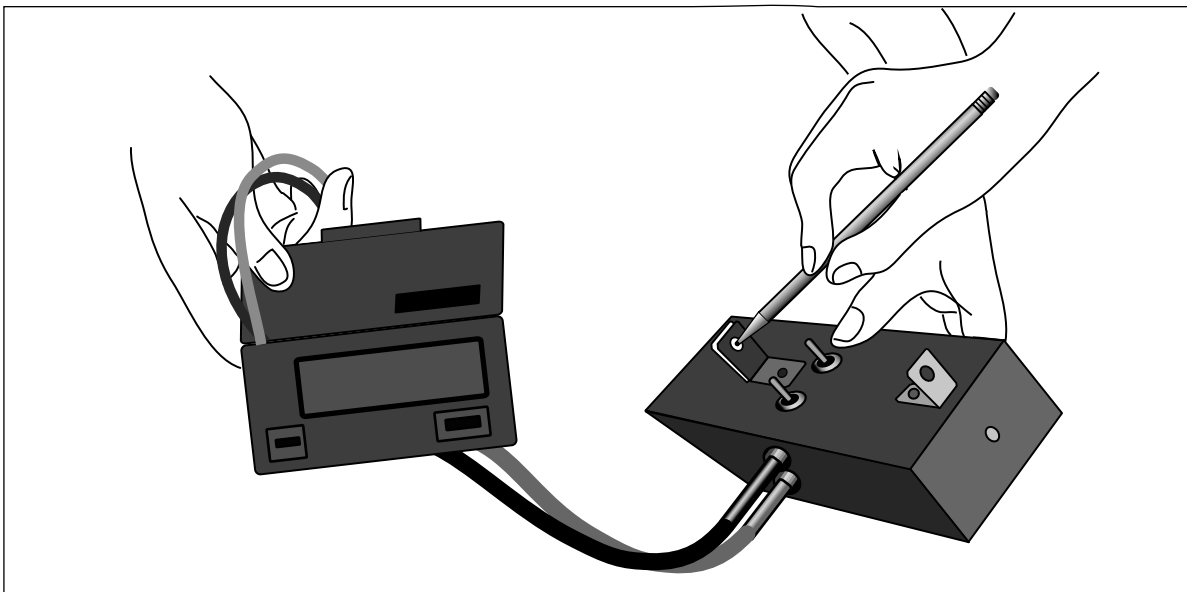

3. There is a small round hole in one end of your photometer. Point this end at the sun. When you do this, the sun shining through the hole in the front alignment bracket makes a small spot of light.
4. Adjust the pointing of your photometer until the spot of sunlight shines on the paper face of the rear alignment bracket. It will be helpful to brace the bottom of the sun photometer against a stationary object.

5. Watch the voltage output and adjust the pointing until the voltage is a maximum. If this voltage is less than 2 V, change the DC voltage range setting on your voltmeter to 2 V.

Note: The voltage will not be constant. There are fluctuations in the atmosphere that cause the voltage to vary continuously by several millivolts. However, there will be one position of your sun photometer that consistently gives the highest voltage readings for the selected channel.

Note: When you are taking these measurements, you need to be aware that there is a slight delay between when the output voltage from the sun photometer changes and when that change is registered on the digital voltmeter. This means that your voltmeter is always a little “behind” in responding to movements of the sun photometer. A little practice will help you take this time lag into account.

6. When you have found the position where the voltage is maximum, this means that the sun shining through the hole in the case is centered on the detector inside. Hold this position and have your partner lightly mark a dot in the center of the sunlit spot on the rear alignment bracket. If the sky near the sun is not completely clear, do the best you can to determine where to put the pencil mark. The dot will not necessarily be in the middle (in a side-to-side direction) of the rear alignment bracket. This is OK.
7. Point the photometer away from the sun and then toward the sun again, using the dot you marked previously as a guide. If the position you have marked is correct, the maximum voltage should be observed with only minor adjustments to the pointing direction. If you believe the position of the dot needs to be changed, erase it and mark it again.
8. Repeat this procedure for the other channel. Mark a separate dot for this second channel.



Instrument Care and Maintenance

Taking Care of Your GLOBE Sun Photometer

Your GLOBE sun photometer is a simple and rugged device with no easily breakable parts. However, you must take care of it in order to make accurate measurements. Here are some things you should do (and *not* do) to make sure your sun photometer performs reliably over long periods of time.

1. *Do not* drop your photometer.
2. *Protect* your sun photometer from dirt and dust by storing it in a sealed plastic bag when you are not using it.
3. *Do not* expose your sun photometer to extremely hot or cold temperatures by leaving it in the sun or on a radiator or by leaving it outside.
4. *Keep* your sun photometer turned off when it is not in use.
5. *Check* the battery voltage every few months. See *Checking Your GLOBE Sun Photometer Battery*. Your sun photometer uses very little power when you take measurements, so the battery should last for many months of normal use. If you accidentally leave the photometer turned on for hours or days when you are not using it, check the battery before taking additional measurements and replace it if necessary.
6. *Do not* modify the electronics inside your sun photometer in any way. The calibration of your instrument depends critically on retaining the original components on the circuit board. With a little care, your sun photometer will work reliably for many years. If it appears not to be working correctly, consult with GLOBE before doing anything else.

7. *Do not* enlarge the hole in the case through which sunlight enters your sun photometer. You might be tempted to do this to make it a little easier to point your instrument at the sun. However, the calibration of your sun photometer and the interpretation of its measurements are based on the size of this hole. If you change it, your measurements will no longer be valid.

Checking and Changing Your GLOBE Sun Photometer Battery

At least every three months, check the charge on the battery in your sun photometer and replace the battery if necessary. Replacing the battery will not change the calibration of your instrument and measurements made with the old battery will be OK as long as you replace the old battery before its voltage falls below 7.5 V.

If you want to convince yourself that replacing the battery has not changed the calibration of your instrument, wait for a clear day. Make a few measurements right before and right after you change the battery. These measurements should be nearly the same.

Note: Any standard 9 V battery is OK. Alkaline batteries are more expensive than other types and are not required. Note that the connectors on the + and - terminals are different, so the battery will fit in its holder only one way. Rechargeable batteries are not recommended for this instrument.



Checking and Changing Your GLOBE Sun Photometer Battery

Student Lab Guide

Task

Check the battery in the sun photometer and replace it if necessary.

What You Need

- Small Phillips-head screwdriver
- Voltmeter
- Any standard, new 9 V battery if the old battery needs replacing (rechargeable batteries are not recommended for this instrument)

In the Lab

1. Open the case by removing the four screws in the cover.
Do not remove the printed circuit board or disturb the electronics in any way.
Do not put your fingers on the front surface of the LED detectors (the round green and red devices on the front of the printed circuit board).
2. With the instrument turned on, use a voltmeter to measure the voltage across the two connectors on the battery holder.
Note that new 9-volt batteries can produce voltages in excess of 10 V.
3. If the voltage is less than 7.5 V, replace the battery.
4. When you are done, check the operation of your sun photometer by letting the sun shine on the LED. You do not have to replace the cover while you are performing this test. Whenever the LED is not shadowed, you should see a voltage substantially larger than the “dark” voltage.
5. When you are sure the photometer is working, replace the cover. Make sure the rear alignment bracket (the one with the paper facing) is at the end opposite from the sunlight aperture in the case. Tighten the screws until they are snug, but do not force them.

Atmospheric Haze Protocol

Classroom Preparation Guide

Task

Record the maximum voltage reading that can be obtained by pointing your photometer at the sun.

Record the precise time of your measurement.

Observe and record cloud conditions and barometric pressure.

What You Need

- Calibrated and aligned GLOBE sun photometer
- Barometer, altimeter or some other source of atmospheric station pressure
- Digital voltmeter
- Watch, preferably digital
- Atmospheric Haze/Aerosols Data Work Sheet*
- GLOBE Cloud Chart
- Pencil or pen

Getting Ready To Take Measurements

In order for the Science Team to interpret measurements made with your sun photometer, you must provide the longitude, latitude, and elevation of your observing site, as required for some other GLOBE measurements. Other values and observations must be provided along with each measurement, as shown on the data entry form. The purpose of this section is to give you the information you need to complete the data entry.

Atmospheric Pressure

This value is easy to get following the *Barometric Pressure Protocol*. What is required for these aerosol measurements is the actual pressure at your measurement site, called the “station pressure.”

Time

It is important to report accurately the time at which you make a measurement because the Science Team needs to calculate solar position at your site and that calculation depends on time. The GLOBE standard for reporting time is UT, which can be calculated from your local clock time based on your time zone and the time of year. For this protocol, it is absolutely essential to convert local time to UT correctly. Be especially careful when your local time is summer time or daylight savings time. For example, you must add 5 hours to convert Eastern Standard Time to UT, but only 4 hours to convert Eastern Daylight Time to UT.

Time should be reported with an accuracy of no less than the nearest 30 seconds. A digital watch or clock is easier to use than an analog one, but in either case you must set your timepiece against a reliable standard. It is true that the time accuracy requirements for this protocol are stricter than for the other GLOBE protocols. However, it is not difficult to set your clock or watch to meet this standard. You can get time online at www.time.gov. In many places, you can get an automated local time report by phone from a local radio or TV station. Your GPS receiver will report UT. In the United States, you

can buy a clock that sets itself automatically by detecting radio signals from the official U.S. “atomic clock.” Once you have set your watch or clock according to a reliable source, it should not require resetting for several weeks.

It might be tempting to use the time stored in your computer as a standard. However, this is not a good idea, as (perhaps surprisingly) computer clocks are often not very accurate, and they must be set periodically according to a reliable standard. Note that some computer operating systems will automatically switch your computer clock back and forth between standard and daylight savings (or summer) time. You should be aware of when this change occurs if you need to manually convert time from your local clock time to UT.

The preferred time of day for reporting sun photometer measurements at most latitudes, during most of the year, is mid-morning. However, it is acceptable to make these measurements any time during the day between mid-morning and mid-afternoon. The Science Team understands that it may be most convenient to take these measurements at the same time you collect your other atmospheric data. Measurements should be made at a relative air mass of no more than 2 whenever possible. (Refer to the Learning Activity that discusses relative air mass. A relative air mass of 2 corresponds to a solar elevation angle of about 30 degrees.) During the winter in temperate and higher latitudes, the relative air mass at your location may always be greater than 2. You can still make measurements, but you should make them as close to solar noon as possible.

Sky Conditions

When you record sun photometer measurements, you should also record other information about the sky, including cloud cover and cloud type, sky color, and your own assessment of how clear or hazy the sky is.

Sky color and haziness are subjective measurements but, with practice, you can learn to be consistent about your own interpretations. For example, you can easily learn to recognize the bright blue clear sky that is associated with low aerosol optical thickness. As the aerosol concentration increases, the sky color changes to a lighter blue color. It may appear milky rather than clear. In some places, especially in and near urban areas, the sky can have a brownish or yellowish tint due to air pollution (primarily particulates and NO_2).

When there are obvious reasons for high values of aerosol optical thickness, the Science Team needs to know about them. This is why you are also asked to comment about why you think a hazy sky is the way it is. It could be due to urban air pollution or dust from agricultural activity, for example.

Sun photometer measurements can be interpreted properly only when the sun is not obscured by clouds. This does not mean that the sky must be completely clear, but only that there must be no clouds in the vicinity of the sun. This is not necessarily a simple decision. It is easy to determine whether low- and mid-altitude cumulus and stratus clouds are near the sun, but cirrus clouds pose a potential problem. These are often thin and may not appear to block a significant amount of sunlight. However, cirrus clouds can affect sun photometer measurements even when they are invisible to the human eye. For this reason, if cirrus clouds are present earlier or later in the day relative to when you report measurements, you should note this fact on your data entry form.

Another difficult situation occurs in typical summer weather, especially near large urban areas. In this environment, very hazy skies and hot humid weather often make it difficult to distinguish cloud boundaries. Such conditions can produce relatively large values of aerosol optical thickness (any value

greater than about 0.3-0.5) that may not represent the actual state of the atmosphere. It is important to describe such conditions whenever you report measurements.

To get a better idea of where cloud boundaries are, you can observe the sky through orange or red sunglasses, or through a sheet of translucent orange or red plastic. These colors filter out blue skylight and make clouds more distinct. However:

Never look directly at the sun, even through colored sunglasses or plastic sheets! This can damage your eyes.

Fog is another potential problem. It can make things look hazy, but fog (condensed water vapor) is not the same as atmospheric haze from aerosols. Conditions where the sun is shining through even light fog are unsuitable for making sun photometer measurements. In many locations fog dissipates before mid-morning, so it will not affect your measurements.

Whenever you try to determine sky conditions before taking sun photometer measurements, you must block the sun itself with a book, a sheet of paper, a building or tree, or some other object. A sensible rule is that if you can see any shadows at all on the ground, you should *not* try to look at the sun. If in doubt, or if you believe you cannot determine sky conditions near the sun, do not make a measurement!

Temperature

The electronics in your GLOBE sun photometer, and especially its LED detectors, are temperature-sensitive. This means that the output will change under the same sunlight conditions as the sun photometer warms and cools. Therefore, it is important to maintain your sun photometer at approximately room temperature. To alert the Science Team to potential problems with temperature, we ask that you report air temperature along with your sun photometer measurements.

If you are making sun photometer measurements at the same time you record temperature data from your weather station, you can use that current temperature. Otherwise, you must measure the air temperature separately. The accuracy requirements for this temperature value are not as strict as they are for your regular GLOBE temperature measurements. You can use just about any thermometer that's handy, including a digital thermometer. Just keep the thermometer (or its sensing element, in the case of a digital thermometer with a remote sensor) out of direct sunlight.

There are some steps you should take to minimize temperature sensitivity problems. Keep your sun photometer inside and bring it outside only when you are ready to make a measurement. In the winter, transport it to the measurement site under your coat, for example, to keep it warm. In very hot or very cold weather, you can wrap the instrument in an insulating material such as an insulated paper sandwich bag, a towel, or pieces of plastic foam. In the summer, keep your instrument shielded from direct sunlight whenever you are not actually making a measurement. You should practice taking and recording measurements so that each measurement takes no more than 10 or 15 seconds. If you are taking measurements right outside a classroom door, it would even make sense to take your sun photometer inside between measurements, even if it's only for a minute or so.

In the Field

It is much easier for two people to take and record measurements than for one person working alone. If you can work as a team, divide up these tasks and go through several practice runs before you start recording real measurements. If you have not done the learning activity that involves marking your sun photometer's rear alignment bracket, you should do that before you make measurements.



1. Connect a digital voltmeter to the output jacks of your sun photometer.

(Analog voltmeters cannot be read accurately enough to be suitable for this task.) Be sure to put the red lead in the red jack and the black lead in the black jack. If your sun photometer has a built-in digital voltmeter, skip this step.

2. Turn the digital voltmeter and sun photometer on.

If your sun photometer has a built-in digital voltmeter, the same switch turns on both the meter and the sun photometer and you do not need to worry about selecting an appropriate voltage range.

Select an appropriate DC volts range. *Be careful not to use an AC volts setting.* The appropriate range setting depends on your voltmeter. If it

has a 2 V (volts) or 2000 mV (millivolts) setting, try that first. If your photometer produces more than 2 V, use the next higher range, often 20 V. Some voltmeters have auto-ranging capability, which means that there is only one DC volts setting and the voltmeter automatically selects the appropriate voltage range. If you are using an auto-ranging voltmeter, make sure you understand how to read voltages in this range.

Note that if your digital voltmeter is connected to your sun photometer and turned on, but the photometer is turned off, you will get unpredictable readings on the voltmeter. This is normal behavior for digital voltmeters. When you turn your sun photometer on, the voltmeter should produce a stable reading in the indicated range.

3. Select either the red or green channel on your sun photometer. It does not matter which channel you select first, but it is a good idea to be consistent about your measurements by always choosing the same channel as the one you record first.

4. Face the sun and point the sun photometer at the sun. (Do not look directly at the sun!) Hold the instrument in front of you about chest-high and find the spot made by the sun as it shines through the front alignment bracket. Here is an important safety rule:

Under no circumstances should you hold the sun photometer at eye level and try to “sight” along the alignment brackets!

Use the cross marked on the rear alignment bracket as an approximate guide to align the sun. Unless the sky is *very* hazy, or unless you are taking measurements late in the afternoon or early in the morning, the voltage should increase to more than 1 V. If you are using an auto-ranging voltmeter, the range will change automatically when you point your photometer directly at the sun.

5. Adjust the pointing until you see the maximum voltage on your digital voltmeter. Record this value on your *Data Work Sheet*.

Be sure to record all the digits displayed on your voltmeter. When you adjust the pointing of your photometer, you are trying to center the sunlight shining through the aperture directly on the LED sensor inside your instrument. Adjusting your sun photometer to obtain the maximum voltage quickly requires some practice. It may help to steady your instrument against a chair, post, or other stationary object. The entire measurement process should not take more than 15 or 20 seconds.

The voltage you read will vary somewhat. This is due to small “jiggles” when you hold the sun photometer and to real fluctuations in the atmosphere itself. Do not try to average the voltmeter readings. It is important to be consistent about recording only the maximum voltage you obtain during a few seconds of measurement time. There is a slight time delay between the time when the voltage output from your instrument changes and when that change is reflected in the digital reading. With a little practice, you can learn to compensate for this time delay.

6. Record the time at which you observed the maximum voltage as accurately and precisely as possible.

An accuracy of 15-30 seconds is sufficient.

7. Shield the sun photometer from the sun by turning away from the sun so direct sunlight is blocked by your body. Cover the aperture to block all light. Take a voltage reading and record this dark voltage reading on your *Data Work Sheet*.

Note that this value must be reported as volts rather than millivolts, regardless of the range setting of your digital voltmeter. It is critical to report both the dark voltage and sunlight voltage in units of volts. It is important to record the dark voltage accurately, reporting all the digits displayed on your voltmeter, because GLOBE can use this value to determine the temperature of the LED at the time of your measurement. Your dark voltage should be less than .020 V (20 mV).

8. Select the other channel on your sun photometer and repeat steps 4-7.
9. Repeat steps 3-8 twice at intervals of roughly one or two minutes.

This will give you three measurements in all. It is a good idea to be consistent about the order in which you record measurements. For example, you could report red, green, red, green, red, green.

The time between measurements is not critical as long as you record the time accurately. If you are going to take more measurements, be sure to protect your photometer from temperature fluctuations. Keep it away from direct sunlight. If it is very hot, take it back inside, or keep it in the shade and in an insulated container such as a cooler or insulated lunch bag. If it is very cold, keep it under your coat. During very hot or very cold weather, you can decrease the time between measurements to as little as 30 seconds in order to minimize the temperature changes inside your sun photometer. **Your measurements will not be accurate if your sun photometer is significantly colder or warmer than room temperature!**

10. Turn off both the sun photometer and the voltmeter (if your instrument does not have a built-in digital voltmeter).
You can disconnect the voltmeter or leave it plugged into the output jacks, depending on whether your class uses the voltmeter for other purposes.
11. Note any clouds in the vicinity of the sun in the comments (metadata) section. Be sure to note the type of clouds by using the GLOBE Cloud Chart.
12. Do the *Cloud Type* and *Cloud Cover Protocols* and record your observations on the *Atmospheric Haze/Aerosols Data Work Sheet*.
13. Open the instrument shelter.
14. Read and record the current temperature as given on the maximum/minimum thermometer to the nearest 0.5° C. Be careful not to touch or breath on the thermometer.
15. Close the instrument shelter.
16. Complete the rest of the *Atmospheric Haze/Aerosols Data Work Sheet*.
17. When you return to your classroom, do the *Barometric Pressure Protocol* and record the reading on your *Data Work Sheet*.

Atmospheric Haze Protocol

Student Field Guide

Task

Record the maximum voltage reading that can be obtained by pointing your photometer at the sun.

Record the precise time of your measurement.

Observe and record cloud conditions and barometric pressure.

What You Need

- | | |
|--|---|
| <input type="checkbox"/> Calibrated and aligned GLOBE sun photometer | <input type="checkbox"/> <i>Atmospheric Haze/Aerosols Data Work Sheet</i> |
| <input type="checkbox"/> Calibrated Barometer or altimeter | <input type="checkbox"/> GLOBE Cloud Chart |
| <input type="checkbox"/> Digital voltmeter | <input type="checkbox"/> Pencil or pen |
| <input type="checkbox"/> Watch, preferably digital | |

In the Field

1. Connect a digital voltmeter to the output jacks of your sun photometer (Skip this step if your sun photometer has a built-in digital voltmeter.)
2. Turn the digital voltmeter and sun photometer on.
3. Select either the red or green channel.
4. Face the sun and point the sun photometer at the sun. (Do not look directly at the sun!)
5. Adjust the pointing until you see the maximum voltage in your digital voltmeter. Record this value on your *Data Work Sheet*.
6. Record the time at which you observed the maximum voltage as accurately and precisely as possible.
7. Shield the photometer from the sun by turning away from the sun so direct sunlight on the photometer is blocked by your body. Cover the aperture to block all light. Take a voltage reading and record this dark voltage reading on your *Data Work Sheet*.
8. Select the other channel and repeat steps 4-7.
9. Repeat steps 3-8 twice at intervals of roughly one or two minutes for each of the two channels. (This will give you three pairs of measurements in all.)
10. Turn off both the sun photometer and the voltmeter.
11. Note any clouds in the vicinity of the sun in the comments (metadata) section. Be sure to note the type of clouds by using the *GLOBE Cloud Chart*.
12. Do the *Cloud Type* and *Cloud Cover Protocols* and record your observations on the *Atmospheric Haze/Aerosols Data Work Sheet*.
13. Open the instrument shelter.
14. Read and record the current temperature as given on the maximum/minimum thermometer to the nearest 0.5° C. Be careful not to touch or breathe on the thermometer.
15. Close the instrument shelter.
16. Complete the rest of the *Atmospheric Haze/Aerosols Data Work Sheet*
17. When you return to your classroom, do the *Barometric Pressure Protocol* and record the reading on your *Data Work Sheet*.



Frequently Asked Questions

1. What is a sun photometer and what does it measure?

A sun photometer is a type of light meter that measures the amount of sunlight. Most sun photometers measure the amount of sunlight for a narrow range of colors or wavelengths. All sun photometers should measure only the sunlight arriving directly from the sun and not the sunlight scattered from molecules and aerosols. Therefore a sun photometer is pointed directly at the sun and the light is collected through a small aperture (hole or opening) that prohibits scattered sunlight from reaching the instrument's detector.

2. The GLOBE sun photometer uses a light-emitting diode (LED) as a sunlight detector. What is an LED?

A light-emitting diode is a semiconductor device that emits light when an electrical current flows through it. The actual device is a tiny chip only a fraction of a millimeter in diameter. In the GLOBE sun photometer, this chip is housed in a plastic housing about 5 mm in diameter. You can find these devices in a wide range of electronic instruments and consumer products. The physical process that causes LEDs to emit light also works the other way around: if light shines on an LED, it produces a very small current. The electronics in your sun photometer amplifies this current and converts it to a voltage.

Generally, the wavelength of light detected by an LED is shorter than the wavelength of light emitted by the same LED. For example, certain red LEDs are relatively good detectors of orange light. The LED in the GLOBE sun photometer emits green light at about 565 nm. It detects light with a peak at about 525 nm, which is a little further into the blue part of the light spectrum than the emission color.

3. What is the field of view of a sun photometer, and why is it important?

The equation that describes theoretically how to interpret sun photometer measurements requires that the instrument should see only direct light from the sun — that is, light that follows a straight line path from the sun to the light detector. This requirement can be met only approximately

because all sun photometers will see some scattered light and direct light from the sky around the sun.

The cone of light a sun photometer's detector sees is called its field of view, and it is desirable to have this cone as narrow as possible. The GLOBE sun photometer's field of view is about 2.5 degrees, which GLOBE scientists have concluded is a reasonable compromise between desires for accuracy and practical considerations in building a handheld instrument. The basic tradeoff is that the smaller the field of view, the harder the instrument is to point accurately at the sun. Very expensive sun photometers, with motors and electronics to align the detector with the sun, typically have fields of view of 1 degree or less. Studies have shown that the error introduced by somewhat larger fields of view is negligible for the conditions under which a GLOBE sun photometer should be used.

The cone of light a GLOBE sun photometer sees through its circular aperture is described mathematically as subtending a solid angle about 2.5 degrees in diameter. The sun itself subtends a solid angle of about 0.5 degrees. You can get a better sense of this by looking at the full moon because coincidentally, due to a combination of size and distance, the moon also subtends a solid angle of about 0.5 degrees. Remember, NEVER look directly at the sun!

4. How important is it to keep the sun photometer from getting hot or cold while I'm taking measurements?

The LED detector in your sun photometer is temperature-sensitive, so its output is slightly influenced by its temperature. Therefore, it is very important to protect your instrument from getting too hot in the summer or too cold in the winter. In the summer, it is essential to keep the instrument case out of direct sunlight when you are not actually taking a measurement. In the winter, it is essential to keep the instrument warm — you can tuck it under your coat between measurements. Never leave your sun photometer outside for extended periods of time.

The sun photometer case itself provides some protection from temperature changes that can



affect the electronics inside. If you follow these precautions and take your measurements as quickly as possible, then your measurements will be all right. In extreme conditions (winter or summer), you should consider making an insulating housing for your sun photometer. You can use styrofoam or other foam plastic. Cut holes for the on/off switch and the sunlight aperture, and a channel for sunlight to get from the front alignment bracket to the target on the back bracket. The hole for the sunlight aperture should be no smaller in diameter than the thickness of the insulating material itself, and in no case should it be smaller than about 1 cm.

5. I dropped my sun photometer. What should I do now?

Fortunately, the components inside your sun photometer are virtually indestructible, so they should have survived being dropped. Check the case for cracks. Even if the case is cracked, you should still be OK. Just tape over the cracks — use something that is opaque, such as duct tape. Open the case and make sure that everything looks OK. In particular, make sure that the battery is still firmly attached to the terminals on the battery holder. If the alignment brackets have moved or are loose as a result of the fall, straighten them and retighten the screws. Apply a little cyanoacrylate glue (“super glue”) at the base of each alignment bracket. Then you should realign your sun photometer by following the alignment protocols.

When you have done these things, try making a measurement. If measurements look OK, they probably are, as the actual calibration of your instrument will not be affected by this kind of accident.

6. How do I know if my sun photometer is working properly?

When you turn your sun photometer on without pointing it at the sun, you should measure a voltage in the range of about 10 to 20 mV (0.010 to 0.020 V). When you point your instrument directly at the sun, the voltage should increase to a value in the range of about 1 to 4 V. Only in very hazy conditions, late in the afternoon, or early in the morning, should you see a sunlight voltage

less than 1 V. If you do not see the expected voltages, then your sun photometer is not working.

The most likely reasons for a sun photometer not to work are that the battery has come loose from the connectors on the battery holder or that the battery is too weak to power the electronics. If the battery seems to be seated properly in the battery holder, then test the voltage. As indicated in the procedure for changing your sun photometer’s battery, you should replace the battery if the voltage is less than 7.5 V. You should check the battery no less frequently than once every three months. If you still believe you have a problem, contact GLOBE for help.

7. What does it mean to calibrate a sun photometer?

A sun photometer is considered to be calibrated if its extraterrestrial constant is known. This is the voltage you would measure with your sun photometer if there were no atmosphere between you and the sun. As a thought experiment, you could think about pointing your sun photometer at the sun from the open cargo bay of the space shuttle as it orbits Earth above the atmosphere. The voltage you measure would be your instrument’s extraterrestrial constant. This value depends primarily on the wavelength at which your sun photometer detects light and also on the distance between Earth and the sun. (This distance varies slightly because Earth follows a slightly elliptical, rather than a circular, path around the sun.)

Note that, for this thought experiment, you do not have to worry about limiting the field of view. Why? Because outside the atmosphere there are no molecules or aerosols to scatter sunlight. Hence, your sun photometer will see only direct sunlight.

As a practical matter, sun photometers can be calibrated by inferring the extraterrestrial constant from measurements made at Earth’s surface. This is called the “Langley plot” method. These measurements are difficult to make at low elevation sites with variable weather. GLOBE sun photometers are calibrated against reference instruments that have been calibrated using



measurements taken at Mauna Loa Observatory, which is widely accepted as one of the best locations for such work.

It is an interesting project to make your own Langley plot calibrations and compare the results with the calibration assigned to your sun photometer. If you would like to do this, contact GLOBE.

8. Can I make my own sun photometer?

You can purchase a sun photometer kit. Constructing a sun photometer involves soldering some electronic components, which is a skill students need to learn from someone who has done it before. You can start taking measurements as soon as you have assembled your instrument, however, at some point, you must send your sun photometer to the GLOBE Atmospheric Haze Science Team for calibration before your data can be accepted into the GLOBE Data Archive.

In principle, you can even make your own sun photometer without using a kit. In this case you still must obtain the op-amp and LED from the Science Team so that the operation of your instrument will be comparable to that of the other sun photometers employed in GLOBE research. These two critical parts are available by contacting GLOBE.

9. How often must I take sun photometer measurements?

The protocols ask that you take measurements every day, weather permitting. In some parts of the world, it is possible to go many days without having weather suitable for taking these measurements. It is highly desirable to have a plan for taking measurements on weekends and during holiday breaks (especially during extended summer holidays).

10. How can I tell whether the sky is clear enough to take sun photometer measurements?

The basic rule is that the sun must not be blocked by clouds during a measurement. It is OK to have clouds near the sun. This can be a difficult decision, because you are never supposed to look directly at the sun. You can look at the sky near the sun by blocking the sun with a book or notebook. An even better idea is to use the corner

of a building to block the sun. It is very helpful to wear sunglasses when you make these decisions because they protect your eyes from UV radiation. Orange-tinted sunglasses will help you see faint clouds that might otherwise be invisible.

If you have concerns about a measurement, indicate them in your qualitative description of sky conditions when you report the measurement. Thin cirrus clouds are notoriously difficult to detect, but they can dramatically affect sun photometer measurements. If you see cirrus clouds in the hours before or after a measurement, be sure to include that in your sky description.

11. What are aerosols?

Aerosols are particles suspended in air. They range in size from a fraction of a micrometer to a few hundred micrometers. They include smoke, bacteria, salt, pollen, dust, various pollutants, ice, and tiny droplets of water. These particles interact with and scatter sunlight. The degree to which they affect sunlight depends on the wavelength of the light and the size of the aerosols. This kind of particle-light interaction is called Mie scattering, named after the German physicist Gustav Mie, who published the first detailed mathematical description of this phenomenon in the early part of the twentieth century.

12. What is optical thickness?

Optical thickness (or optical depth) describes how much light passes through a material. The amount of light transmitted can be quite small (less than a fraction of 1%) or very large (nearly 100%). The larger the optical thickness, the less light passes through the material. As applied to the atmosphere, aerosol optical thickness (AOT) describes the extent to which aerosols impede the direct transmission of sunlight of a certain wavelength through the atmosphere. In a very clear sky, AOT can have values of 0.05 or less. Very hazy or smoky skies can have AOT values in excess of 1.0.

Percent transmission through the atmosphere is an alternate way to describe the same phenomenon. There is a simple relationship between AOT and percent transmission:

transmission (expressed as a percent) = $100 e^{(-AOT)}$



Look at Table AT-AH-1 to see the percent transmission for several values of AOT. Any scientific calculator has an e^x function key. Try to reproduce one or more of the examples in this table to check if you understand how to use a calculator to convert AOT to percent transmission.



13. What is Beer's Law?

August Beer was a nineteenth-century German physicist who worked in the field of optics. He developed the principle known as Beer's Law, which explains how the intensity of a beam of light is reduced as it passes through different media. Other nineteenth-century physicists also examined this law and applied it to the transmission of sunlight through the atmosphere. Hence, the equation used to describe how sun photometers work is usually referred to as the Beer/Lambert/Bouguer law. The *Solar Gnomon Learning Activity* includes elements to help you see how to apply this law yourself and to calculate aerosol optical thickness. You need to be comfortable with exponential and logarithmic functions to do this.



14. What is relative air mass (m)?

Relative air mass (m) is a measure of the amount of atmosphere through which a beam of sunlight travels. At any location or elevation, the relative air mass is 1 when the Sun is directly overhead at solar noon. (Note: At any latitude greater than about 23.5 degrees, north or south, the sun is never directly overhead, so the sun can never be observed directly through a relative air mass of 1.) A simplified formula for relative air mass is $m = 1/\sin(\text{elevation})$ where "elevation" is the angle of the sun above the horizon. This calculation is sufficiently accurate for relative air masses up to about 2. Larger values require a more complicated formula that corrects for the curvature of the earth's surface. Refer to the *Solar Gnomon Learning Activity* to learn how to observe elevation angle and relative air mass directly.



15. What is Rayleigh scattering?

Molecules of air scatter sunlight. Air molecules scatter ultraviolet and blue wavelengths much more efficiently than red and infrared wavelengths. (This is why the sky is blue.) This process was first described in the nineteenth



century by the Nobel-prize-winning British physicist John William Strutt, the third Baron Rayleigh. You can easily observe Rayleigh scattering — a simple experiment is described in the *Solar Gnomon Learning Activity*.

16. How accurate are aerosol measurements made with the GLOBE sun photometer?

The accuracy of sun photometer measurements has been studied for decades by atmospheric scientists, and it remains a topic of some debate. There are some inherent limitations to measuring atmospheric aerosols from Earth's surface, and there are also some limitations imposed by the design of the GLOBE sun photometer. Measurements made carefully according to the experiment protocols should be accurate to within less than about 0.02 AOT units. For very clear skies, with AOT values of perhaps less than 0.05, this is a significant percentage error. However, even operational "professional" sun photometers claim accuracies of no better than 0.01 AOT units. Thus, the accuracy of measurements made carefully with a GLOBE sun photometer are comparable to measurements made with other sun photometers.

Unlike some other GLOBE measurements, there is no easily accessible standard against which to check the accuracy of AOT calculations. GLOBE aerosol measurements will be subjected to scrutiny by GLOBE investigators and others for the foreseeable future. Nevertheless, it is fair to say that GLOBE aerosol measurements can achieve a level of accuracy that can be extremely useful to the atmospheric science community.

17. Will scientists really be interested in my aerosol measurements?

Compared to the previous question, the answer to this one is easy: an only slightly qualified "Yes." Comparatively few sun photometers are in use around the world. Since recent studies have shown that aerosols can block considerable sunlight, thus causing a cooling effect on the earth's climate, there is renewed interest in sun photometer measurements. Upcoming earth-monitoring satellite missions will focus on global characteristics of the atmosphere and its constituents. It is essential that reliable ground-

based data measurements be available to calibrate satellite instruments and validate their measurements. GLOBE schools provide the *potential* to establish a global aerosol monitoring network that is otherwise unattainable.

On a regional scale, there is essentially no comprehensive monitoring of aerosols produced naturally by water vapor, naturally occurring forest and brush fires, dust, pollen, gases emitted by plants and trees, sea salt, and volcanic eruptions. The same is true for monitoring aerosols produced by automobile emissions, coal-burning power plants, intentional burning of forests and rangelands, certain industrial and mining operations, and dust from unpaved roads and agricultural fields. Again, GLOBE schools provide the *potential* for addressing these topics.

Here's the qualification to the "Yes." In all but a few very specialized situations, aerosol measurements must be taken in the same place for many months, and even for years, in order to have lasting scientific interest. It is sometimes difficult to keep in mind the long-term value of making the same measurements day after day. (This is a problem not just for aerosol measurements, of course.) In the case of aerosols, persistence is especially important due to the long time scales required to observe and analyze significant changes in the atmosphere. However, if you follow the protocols and provide careful measurements (especially during the summer), then there is no doubt that scientists will value your contribution now and in the future.